

Peacofloor provides long lasting system



System just applied



1.5 year after

Peacofloor 389 system had been applied on the car park of ShenZhen Aerospace Commercial Building. There is no sign of damage and the surface remain gloss and shiny after one year service.

SPECIALIST FLOORING WORLDWIDE



Peacoseal

EPOXY COATING SYSTEM


Anti-Abrasion

Fast Drying

Anti-Skid

Economic

Total Solutions on steel and concrete




R&D Production Marketing Application After-Sales

www.cschk.com




CHUNG SHUN CHEMICAL(HK)CO LTD

Unit 202, 2/F, On Tai Industriat Centie, No.4
On Chuen Street, Fanling, N.T. Hong Kong
TEL:(852)2959 3998 FAX:(852)3521 0438

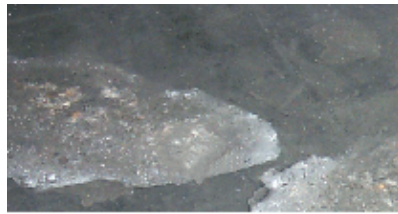


Reasons to protect the concrete

Concrete is alkaline in nature. As the atmosphere is polluted with acidic gases, like carbon dioxide and sulphur dioxide, the neutralization process leads to extensive erosion of concrete. On the other hand, concrete is porous and easily absorb moisture and foreign material which make cleaning difficult. Protection on concrete surface become important and essential.

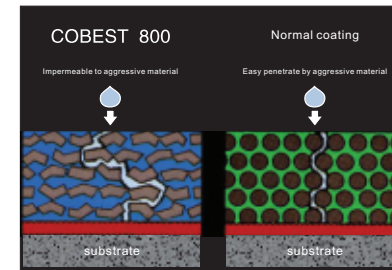

Peacofloor 389 high cross-linked epoxy

Highly impermeable: The coating is filled with glass-flake to lengthen the route for water and other chemical permission.
Impact resistance: Glass-flake structure provides a very good physical strength for the coating itself.

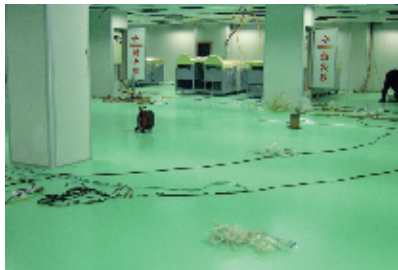

Cobest product provides more than concrete protection.

Peacoseal system protect the concrete surface from atmospheric erosion even in low film thickness application. Some systems provide impermeable and anti-abrasion characteristic. Peacoseal system also features with attractive gloss, durable finish, good adhesion and low maintenance cost.




Peacofloor 388 Textured Finish

With the use of different kinds of additive, cobest 388 can provides different textures and anti-skid property in single application.

Peacoseal System

Peacoseal 11 Epoxy Coating System

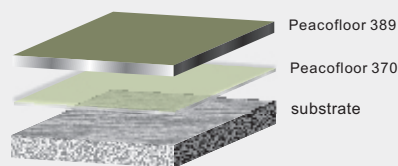


System Thickness: 0.25-0.5mm

Application: Car Park
Plant Room
and Warehouse

Features: Economic and short working period

Peacoseal 12 Textured Epoxy Coating System

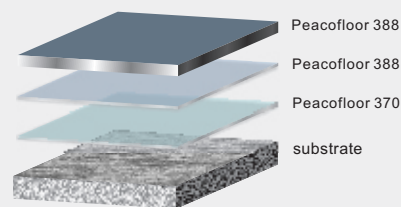


System Thickness: 0.35-0.65mm

Application: Vehicle repair workshop

Features: Highly impermeable anti-abrasion

Peacoseal 13 system Polyurethane Coating System

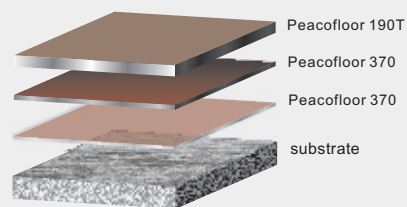

System Thickness: 0.35-0.55mm

Application: Ramp and anti-skid application

Features: Highly impermeable anti-skid

